



RDO Finance Quote - Lease

RDO Equipment Co.
102 Wilcox Road
Laredo TX, 78043

Phone: (956) 718-1909 - Fax: (956) 718-2064

Prepared For:
WEBB COUNTY ROAD & BRIDGE
1110 WASHINGTON ST
STE 101
LAREDO, TX, 780404466
(956) 523-5300

Prepared By:
Name: Maria Hernandez
Title: Sales Coordinator
Phone: (830) 632-3128
Mobile:

Name: Ken Sweet
Title: Regional Finance Manager
Phone: (830) 632-3124
Mobile: (210) 602-7363

Equipment Information

Status / Year / Make / Model	Serial Number
New 2017 JOHN DEERE 622GX	1DW622GXHHF682907

Quote Overview

Selling Price:	\$274,467.58
DOC/UCC Fees:	\$550.00
Amount to Finance:	\$275,017.58

Quote Options

	Lender	Frequency	Term	Number Of Payments	Security Deposit	Number of Advanced Payments	Payment (Plus Applicable Taxes)	Annual Hours	Purchase Option or FMV
Option 1	John Deere Financial	Monthly	36	36	\$0.00	0	\$3,760.15	1500	\$180,818.00 (PO)

Other Notices

All Numbers subject to Final Credit Approval

Option Weights 622G/GP

Moldboards with Through-Hardened Dura-Max Cutting Edge	
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	0 kg (0 lb.)
3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	45 kg (99 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 152-mm x 16-mm (6 in. x 5/8 in.) cutting edge and 16-mm (5/8 in.) hardware	105 kg (231 lb.)
4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.) with 203-mm x 19-mm (8 in. x 3/4 in.) cutting edge and 16-mm (5/8 in.) hardware	157.4 kg (347 lb.)
Extensions, 610 mm (2 ft.) (right or left)	
For Use with 610-mm (24 in.) Moldboards	116 kg (255 lb.)
Overlay End Bits, Reversible (one pair)	
For 152-mm (6 in.) Cutting Edge	19.5 kg (43 lb.)
For 203-mm (8 in.) Cutting Edge	23 kg (51 lb.)
Circle-Drive Slip Clutch	9 kg (20 lb.)
Moldboard Impact-Absorption System	43 kg (95 lb.)
Ripper/Scarifier, Rear Mounted with Hitch and Ripper Shanks (3)	1139 kg (2,510 lb.)
Scarifier Shanks with Teeth (9 for rear ripper/scarifier)	68 kg (150 lb.)
Rear Counterweight with Integral Rear Hitch	727 kg (1,603 lb.)
Rear Hitch	54.4 kg (120 lb.)
Push Block, Front	907 kg (2,000 lb.)
Scarifier	
Front Mount with Teeth (5)	831 kg (1,833 lb.)
Mid-Mount with Teeth (11)	1481 kg (3,265 lb.)

Machine Dimensions

A	Height to Top of Cab	3.18 m (10 ft. 5 in.)
A ¹	Height to Top of Full-Height Cab	3.40 m (11 ft. 2 in.)
B	Height to Top of Exhaust (9.0L engine)	3.10 m (10 ft. 2 in.)
C	Height to Top of Blade-Lift Cylinders	3.05 m (10 ft. 0 in.)
D	Tandem Axle Spacing	1.54 m (5 ft. 1 in.)
E	Blade Base	2.57 m (8 ft. 5 in.)


Option Weights (continued) 622G/GP

Front Lift Group (Balderson-style)	763 kg (1,682 lb.)
Tires	
14.00-24, 12 PR G2	- 220.4 kg (- 486 lb.)
17.5-25, 12 PR G2/L2	- 106 kg (- 234 lb.)
14.00-R24, Radial, G2/L2 General Purpose	0 kg (0 lb.)
14.00-R24, Radial, G2/L2 Snow	40.8 kg (90 lb.)
17.5-R25, Radial, L2 General Purpose	51.7 kg (114 lb.)
17.5-R25, Radial, G2/L2 Snow	95.3 kg (210 lb.)
17.5-R25, Radial, G3/L3 General Purpose	141.5 kg (312 lb.)
Multi-Piece Rims	
254 mm x 610 mm (10 in. x 24 in.)	0 kg (0 lb.)
356 mm x 635 mm (14 in. x 25 in.)	85.3 kg (188 lb.)
Fenders	
Front	77 kg (169 lb.)
Rear	141 kg (310 lb.)
Low Cab with Opening Front and Side Windows	14.5 kg (32 lb.)
Premium Air-Suspension, Heated Seat with Adjustable Arm- and Headrests	13 kg (28 lb.)
Coolant Heater	4 kg (9 lb.)
Quick Service	11 kg (24 lb.)
Secondary Steering	26 kg (58 lb.)
Beacon Bracket	8 kg (18 lb.)
Fire Extinguisher	14.5 kg (32 lb.)
Lighting Packages	
10 Halogen Lights	4.5 kg (10 lb.)
16 Halogen Lights	7 kg (16 lb.)
18 Halogen Lights	8 kg (18 lb.)
High-Front Light Bar for Snowplowing	20 kg (44 lb.)
Auxiliary Hydraulic Control Valve Section and Controls	7 kg (15 lb.)
Hydraulics for Front-Mounted Equipment	9 kg (19 lb.)

Machine Dimensions (continued)

F	Wheelbase	6.16 m (20 ft. 3 in.)
G	Overall Length	8.89 m (29 ft. 2 in.)
H	Overall Length with Scarifier	9.69 m (31 ft. 9 in.)
I	Overall Length with Push Block and Ripper	9.99 m (32 ft. 9 in.)
I ¹	Overall Length with Scarifier and Ripper	10.59 m (34 ft. 9 in.)

For Overall Width see Tires/Wheels on page 16.

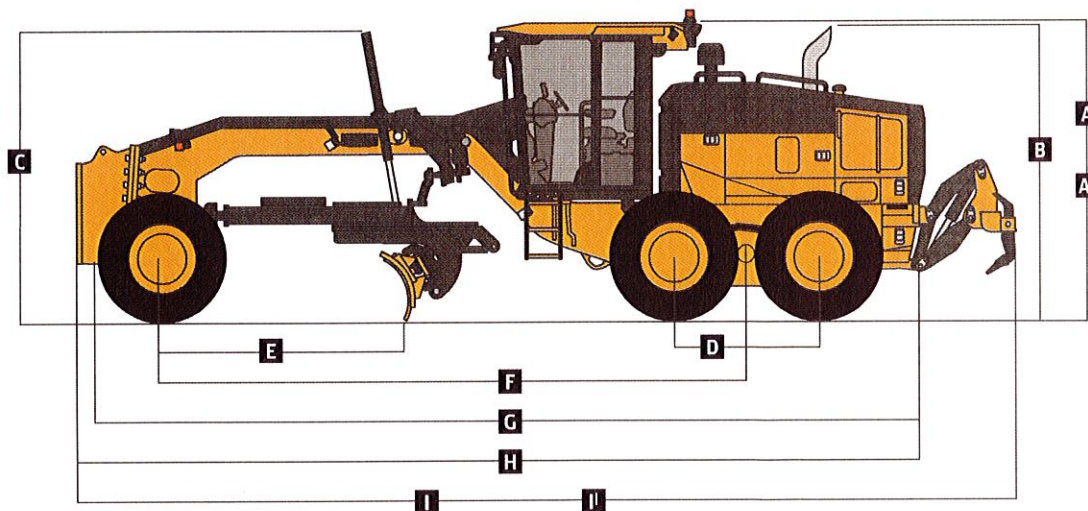

Additional equipment

Key: ● Standard ▲ Optional or special See your John Deere dealer for further information.

622	672	772	872	Operator's Station
●	●	●	●	Low-profile ROPS/FOPS cab with HVAC (ROPS ISO 3471 / FOPS SAE 3449 Level II)
▲	▲	▲	▲	Low-profile ROPS/FOPS cab utilizing laminated glass with fixed lower front and side opening windows
▲	▲	▲	▲	Opening front and side windows (standard with Grade Pro)
●	●	●	●	Keyless start with multiple security modes
●	●	●	●	Fabric air-suspension seat with armrests and headrest
▲	▲	▲	▲	Premium heated, leather/fabric, high-wide-back, air-suspension seat with armrests (standard with Grade Pro)
●	●	●	●	Sealed-switch module with function indicators
●	●	●	●	Electric rear-window defroster
●	●	●	●	Upper front windshield washers with intermittent wipers
▲	●	●	●	Upper rear windshield washers with intermittent wipers
▲	▲	▲	▲	Lower front intermittent wiper and washer
▲	▲	▲	▲	Powered cab precleaner
▲	▲	▲	▲	Decelerator pedal
▲	▲	▲	▲	Flip-down, right- and/or left-hand cab beacon with bracket
●	●	●	●	Cab prewired for beacon, radio, and auxiliary circuit
▲	▲	▲	▲	Front window sun visor / retractable rear sunshade
●	●	●	●	Rearview mirrors, exterior (2) (SAE J985)
▲	▲	▲	▲	Heated exterior mirrors (2) (SAE J985)
▲	▲	▲	▲	Fire extinguisher
▲	▲	▲	▲	High-resolution rearview camera with dedicated monitor
●	●	●	●	Retractable seat belt, 76 mm (3 in.) (SAE 386)
▲	▲	▲	▲	AM/FM radio with auxiliary and Weather Band (WB)
▲	▲	▲	▲	AM/FM radio with Bluetooth®, auxiliary, WB, and XM Satellite Radio™ ready
●	●	●	●	Push-button-activated cruise control

622	672	772	872	Electrical
●	●	●	●	100-amp alternator
▲	▲	▲	▲	130-amp alternator
▲	▲	▲	▲	200-amp alternator (FT4/Stage IV)
●	●	●	●	Batteries (2), 1,400 CCA with 440-min. reserve capacity
▲	●	●	●	Left-hand engine compartment service-check light
▲	▲	▲	▲	Right-hand engine compartment service-check light
●	●	●	●	Transporting lights (4 halogen)
▲	▲	▲	▲	Grading lights (10 halogen lights)
▲	▲	▲	▲	Deluxe grading lights (18 halogen lights)
▲	▲	▲	▲	Premium grading lights (18 LED lights)
	▲	▲	▲	Tall front snowplow light bar
●	●	●	●	Multifunction/multi-language diagnostic LCD color monitor
●	●	●	●	Reverse warning alarm (SAE J994)
●	●	●	●	LED brake and turn lights

Moldboard

Patented pre-stressed, high strength, wear resistant:

●	●	●		3.66 m x 610 mm x 22 mm (12 ft. x 24 in. x 7/8 in.)
	▲	▲	▲	3.66 m x 686 mm x 25 mm (12 ft. x 27 in. x 1 in.)
	▲	▲	▲	3.96 m x 686 mm x 25 mm (13 ft. x 27 in. x 1 in.)
▲	▲	▲	▲	4.27 m x 610 mm x 22 mm (14 ft. x 24 in. x 7/8 in.)
	▲	▲	●	4.27 m x 686 mm x 25 mm (14 ft. x 27 in. x 1 in.)
			▲	4.88 m x 686 mm x 25 mm (16 ft. x 27 in. x 1 in.)
●	●	●	●	Quick-change and jackscrew-adjustable moldboard side-shift extreme-duty wear inserts
▲	▲	▲		610-mm (24 in.) left- or right-hand extensions for 610-mm (24 in.) moldboard
		▲	▲	610-mm (24 in.) left- or right-hand extensions for 686-mm (27 in.) moldboard
▲	▲	▲	▲	Reversible overlay endbits

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment; 14.0 x 610-mm (24 in.) 12 PR G2, Bias tires and 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 7/8 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (6.3 in. x 6 in.) Dura-Max® through-hardened-steel cutting edges for the 622G, 672G, and 772G; and 17.5 R 635-mm (25 in.) L2, Radial tires and 4.27-m x 688-mm x 25-mm (14 ft. x 27 in. x 1 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (6.3 in. x 6 in.) Dura-Max through-hardened-steel cutting edges for the 872G. Weights include lubricants, coolants, full fuel tanks, and 79-kg (175 lb.) operators.

Additional equipment *(continued)*

Key: ● Standard ▲ Optional or special See your John Deere dealer for further information.

622	672	772	872	Overall Vehicle
●	●	●	●	JDLink™ Ultimate wireless communication system (available in specific countries; see your dealer for details)
●	●	●	●	Ground-level fuel and diesel exhaust fluid (DEF) filling
▲	●	●	●	Fluid-sampling ports for engine oil and coolant, hydraulic oil, and axle and transmission fluids
●	●	●	●	Vandal-protection locking for: Cab doors / Top tank radiator-access door / Engine coolant surge tank / Hydraulic reservoir cap / Battery-disconnect switch / Ground-level electrical master disconnect switch / Fuel-tank door and cap / Toolbox
●	●	●	●	Environmental drains with hoses for engine, transmission, hydraulic, differential fluids, and engine coolant
▲	●	●	●	Hydraulically driven cool-on-demand reversing fan
●	●	●	●	Banked easy-access vertical spin-on filters for hydraulic, transmission, and axle fluids
●	●	●	●	Engine rotary ejector precleaner
●	●	●	●	Automatic differential lock
●	●	●	●	Engine-stall prevention and auto shutdown
▲	▲	▲	▲	Adjustable rotary engine precleaner (FT4/Stage IV)
	▲	●	●	Heavy-duty air cleaner (FT4/Stage IV)
●	●	●		Single-input circle drive
▲	▲	▲		Single-input circle drive with slip clutch
	▲	▲	●	Heavy-duty dual-input circle drive without slip clutch
	▲	▲	▲	Heavy-duty dual-input circle drive with slip clutch
▲	▲	▲	▲	AutoShift transmission
▲	▲	▲	▲	Blade-impact-absorption system
▲	▲	▲	▲	Front and/or rear wheel fenders
▲	▲	▲	▲	Quick-service bank for transmission, hydraulic, engine oil, and engine coolant fluid changes
▲	▲	▲	▲	Secondary steering
	▲	▲	▲	Sound-absorption package (Tier 3/Stage IIIA and Tier 2/Stage II)

622	672	772	872	Front Attachments
▲	▲	▲	▲	Front push block
▲	▲	▲	▲	V-type front scarifier with float position, 5 shanks
▲	▲	▲	▲	Mid-mount scarifier with float position, 11 shanks
▲	▲	▲	▲	Front Balderson-style lift group with float position
▲	▲	▲	▲	Front-mounted dozer blades
Rear Attachments				
●	●	●	●	Full bottom guard with access panel and side guards for rear vehicle protection
▲	▲	▲	▲	Rear-mounted ripper/scarifier combination with rear hitch and pin, 3 ripper shanks
▲	▲	▲	▲	Rear counterweight with rear hitch and pin
▲	▲	▲	▲	Rear hitch and pin
▲	▲	▲	▲	Extra scarifier shanks (9) with teeth for rear ripper scarifier
	▲	▲	▲	Extra ripper shanks (2) with teeth for rear ripper/scarifier
Grade Pro (GP) Option				
●	●	●	●	Low-profile GP cab with opening lower front and side windows
▲	▲	▲	▲	Low-profile GP cab utilizing laminated glass with fixed lower front and side opening windows
●	●	●	●	Premium heated, leather/fabric, high-wide-back, air-suspension seat with armrests
▲	▲	▲	▲	Dual-joystick controls
▲	▲	▲	▲	Fingertip armrest-mounted controls including steering lever
●	●	●	●	Steering wheel
●	●	●	●	Cross-slope
●	●	●	●	Return to straight
●	●	●	●	Grade-control-ready package
Grade Control				
▲	▲	▲	▲	Mast mounts
▲	▲	▲	▲	Topcon ready on GP models*
▲	▲	▲	▲	Trimble ready on GP models*
▲	▲	▲	▲	Leica ready on GP models*

*Available soon on G models.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan at test conditions specified per ISO9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with standard equipment: 14.0 x 610-mm (24 in.) 12 PR G2, Bias tires and 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 1/2 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max® through-hardened-steel cutting edges for the 622G, 672G, and 772G, and 17.5 R 635-mm (25 in.) L2, Radial tires and 4.27-m x 688-mm x 25-mm (14 ft. x 27 in. x 1 in.) high-strength, wear-resistant moldboards with 16-mm x 152-mm (0.63 in. x 6 in.) Dura-Max through-hardened-steel cutting edges for the 872G. Weights include lubricants, coolants, full fuel tanks, and 79-kg (175 lb.) operators.

622G / GP SPECIFICATIONS



Hydraulics		622G/GP
Type	Closed-center, pressure-compensated load-sensing (PCLS), variable-displacement piston pump	
Maximum Pump Flow	212 L/min. (56 gpm)	
Maximum System Pressure	18 961 kPa (2,750 psi)	
Pump Displacement	90 cm ³ (5.5 cu. in.)	
Blade Function		
All-hydraulic, industry-standard lever placement of blade-function controls; includes float position; 7 discrete saddle positions		
Blade Range		
Lift Above Ground	490 mm (19.3 in.)	
Blade Side Shift (right or left)	683 mm (26.9 in.)	
Pitch at Ground Line		
Forward	42 deg.	
Back	5 deg.	
Shoulder Reach Outside Wheels (frame straight, right or left)	2083 mm (82.0 in.) (6 ft. 10 in.)	
Bank Cut Angle (right or left)	90 deg.	
Blade Pull		
At Maximum Operating Weight	20 412 kg (45,000 lb.)	
Electrical		
Solid-state load center and sealed-switch module	<i>EPA Final Tier 4/EU Stage IV</i>	
Voltage	24 volt	
Number of Batteries	2	
Battery Capacity	1,400 CCA	
Reserve Capacity	440 min.	
Amp-Hour Rating	224 amp-hour	
Alternator Rating		
Base	130 amp	
Optional	200 amp	
Lights	Driving lights; 2 high- and 2 low-beam halogen headlights; front and rear LED turn signals and marker lights; LED brake and hazard warning lights	
Mainframe		
Type	Welded box construction	
Width (minimum)	307 mm (12.1 in.)	
Height (minimum)	307 mm (12.1 in.)	
Thickness		
Side	16 mm (0.63 in.)	
Top and Bottom Plate	23 mm (0.89 in.)	
Modulus		
Minimum Vertical Section	1445 cm ³ (88 cu. in.)	
Average Vertical Section at Saddle	2245 cm ³ (137 cu. in.)	
Draft Frame (drawbar)		
Welded box construction machined for flatness with double ball-and-socket pivot connection equipped with quick-change replaceable wear inserts		
Circle		
Welded construction, heat-treated, machined for flatness, equipped with quick-change replaceable wear inserts		
Circle Diameter	1524 mm (60 in.)	
Rotation	360 deg.	
Drive	Hydraulic motor and worm gear with positive lock	
Circle Side Shift (right and left)	787 mm (31 in.)	
Moldboard		
High-strength, pre-stressed for higher strength; wear-resistant, high-carbon steel and reversible end bits; blade side-shift wear system includes quick-change replaceable wear inserts and quick-adjust jackscrew system		
Base Length	3.66 m (144 in.) (12 ft. 0 in.)	
Height (measured along arc, including cutting edge)	610 mm (24 in.)	
Thickness	22 mm (0.88 in.)	
Cutting Edge		
Dura-Max™ through-hardened steel edge		
Thickness	16 mm (0.62 in.)	
Width	152 mm (6 in.)	



622G / GP SPECIFICATIONS

Engine	622G/GP
Manufacturer and Model	John Deere PowerTech™ PSS 6.8L
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV
Cylinders	6
Displacement	6.8L (414 cu. in.)
Net Engine Power	
Gear 1	127 kW (170 hp)
Gear 2	138 kW (185 hp)
Gear 3	149 kW (200 hp)
Gear 4	157 kW (210 hp)
Gear 5	157 kW (210 hp)*
Gear 6	160 kW (215 hp)*
Gear 7	164 kW (220 hp)*
Gear 8	168 kW (225 hp)*
Net Peak Torque	1035 Nm (763 lb.-ft.)
Net Torque Rise	43%
Aspiration	Series turbocharged, charge-air cooled
Lubrication	Full-flow spin-on filter and integral cooler
Air Cleaner with Restriction Indicator	Dual element, dry
<i>*6WD not available.</i>	
Cooling	
Engine Coolant, Extended Life, Rating	-37 deg. C (-34 deg. F)
Powertrain	
6-Wheel Drive	Automatic dual-path hydrostatic drive; increases tractive effort and front-end control; includes separate left and right systems with variable-displacement pumps, axial-piston wheel motors, and freewheel at transport speeds; operator-selectable 15-position rotary aggressiveness control and inching capability down to 0 mph; precision mode (propelled by front wheels only) 1-4 forward and reverse
Effective Gears	
Precision Mode	
Effective Gears	1-3 forward only
Operating Speeds	0.4-8.0 km/h (0.25-5.0 mph)
Hydrostatic Pumps (2 each)	53 cm ³ (3.2 cu. in.)
Wheel Motors	57 cm ³ (3.5 cu. in.)
Final Reduction	38.7:1
Transmission	Direct-drive John Deere PowerShift Plus™, modulated shift-on-the-go, Event-Based Shifting (EBS), inching pedal; independent transmission reservoir with separate filtration and cooling system with 117-L/min. (31 gpm) gear pump
Gears	
Forward	8
Reverse	8
Maximum Travel Speeds	<i>No tire slip at 2,180 rpm, 14.0-R24 tires</i>
Gear 1	4.0 km/h (2.5 mph)
Gear 2	5.6 km/h (3.5 mph)
Gear 3	7.7 km/h (4.8 mph)
Gear 4	10.9 km/h (6.8 mph)
Gear 5	16.4 km/h (10.2 mph)
Gear 6	23.2 km/h (14.4 mph)
Gear 7	32.3 km/h (20.1 mph)
Gear 8	45.5 km/h (28.3 mph)
Front Axle	Heavy-duty welded fabrication
Oscillation (total)	32 deg.
Wheel Lean Angle (each direction)	20 deg.
Differentials	Spiral bevel; hydraulically actuated, clutch type can be applied on-the-go; selectable manual or automatic differential lock
Steering (all models include steering wheel)	All-hydraulic power-frame articulation for maneuverability and productivity; crab steering reduces side drift, positions tandems on firm ground, and increases side-slope stability; return-to-straight control included in Grade Pro (GP) option
Turning Radius (front steer and articulation)	7.21 m (284 in.) (23 ft. 8 in.)
Articulation (both right and left)	22 deg.
Final Drives	Inboard-mounted planetary sealed in cooled, filtered oil
Brakes	Foot-controlled, hydraulically operated, multiple wet-disc brakes sealed in pressurized, cooled, filtered oil; both independent systems effective on all 4 tandem wheels
Primary and Secondary Brakes	Hydraulically actuated, inboard of tandem pivot, self-adjusting, sealed in cooled and filtered oil, multi-disc (ISO 3450)
Parking Brake	Automatically spring applied, hydraulically released, oil cooled, self-adjusting (ISO 3450)

622G/GP

Scarifiers		622G/GP
		<i>Front</i>
Type		V-type toolbar with manual 2-pitch positions and hydraulic float
Width of Cut		1.20 m (48 in.) (4 ft. 0 in.)
Number of Shanks/Teeth		5 (maximum capacity 9)
Lift Above Ground		589 mm (23.2 in.)
Maximum Depth		335 mm (13.2 in.)
Shank		
Spacing		146 mm (5.75 in.)
Size		25 x 76 mm (1 x 3 in.)
		<i>Mid-mount</i>
Type		Radial linkage, with NeverGrease™ pin joints; V-type manual 3-pitch positions and hydraulic float
Width of Cut		1.19 m (46.7 in.) (3 ft. 11 in.)
Number of Shanks/Teeth		11
Lift Above Ground		335 mm (13.2 in.)
Maximum Depth		325 mm (12.8 in.)
Shank		
Spacing		117 mm (4.6 in.)
Size		26 x 76 mm (1 x 3 in.)
Front Lift Group (Balderson-style)		
Parallel linkage, mechanical pins, and hydraulic float		
Lift		
Above Ground (top of tube)		1864 mm (73.4 in.)
Range		988 mm (38.9 in.)
Rear Ripper/Scarifier		
Parallel linkage, with NeverGrease pin joints, hydraulic float, and integrated hitch		
		<i>Ripper</i>
Width of Cut		2.21 m (87.2 in.) (7 ft. 3 in.)
Number of Shanks/Teeth		3 (maximum capacity 5)
Lift Above Ground		602 mm (23.7 in.)
Maximum Depth		426 mm (16.8 in.)
Force at Typical FT4 Weight		
Penetration		9488 kg (20,918 lb.)
Pry-Out		12 358 kg (27,246 lb.)
Shank Size		61.5 x 133 mm (2.42 x 5.25 in.)
		<i>Scarifier</i>
Width of Cut		2.18 m (86 in.) (7 ft. 2 in.)
Number of Shanks/Teeth		None standard (maximum capacity 9)
Lift Above Ground		810 mm (31.9 in.)
Maximum Depth		323 mm (12.7 in.)
Force at Typical FT4 Weight		
Penetration		—
Pry-Out		—
Shank Size		25 x 76 mm (1 x 3 in.)
Operator Station		
Low-profile cab with ROPS (ISO 3471-2008) and FOPS (ISO 3449-2005)		
Tires/Wheels		
		<i>14R24 on 254-mm (10 in.) Rim</i>
Wheel Tread on Ground		2.08 m (82.0 in.)
Overall Width		2.49 m (98.0 in.)
Ground Clearance (front axle)		587 mm (23.1 in.)
		<i>17.5R25 on 356-mm (14 in.) Rim</i>
Wheel Tread on Ground		2.16 m (85.0 in.)
Overall Width		2.64 m (104.0 in.)
Ground Clearance (front axle)		587 mm (23.1 in.)
Serviceability		
Refill Capacities		<i>EPA Final Tier 4/EU Stage IV</i>
Fuel Tank		416.5 L (110 gal.)
Diesel Exhaust Fluid (DEF) Tank		22.5 L (6 gal.)
Cooling System		51.0 L (13.5 gal.)
Engine Oil with Filter		31.5 L (8.3 gal.)
Transmission Fluid		28.4 L (7.5 gal.)
Differential Housing		38.0 L (10 gal.)
Tandem Housings (each)		74.0 L (19.5 gal.)
Circle Gearbox		5.7 L (1.5 gal.)
Hydraulic Reservoir		60.5 L (16 gal.)
Operating Weights		
With Full Fuel Tank, 3.66-m x 610-mm x 22-mm (12 ft. x 24 in. x 0.88 in.) Moldboard with 152-mm x 16-mm (6 in. x 5/8 in.) Cutting Edges, 14R24 L2 Tires, and 79-kg 175 lb.) Operator		
		<i>EPA Final Tier 4/EU Stage IV</i>
Front		4781 kg (10,540 lb.)
Rear		11 984 kg (26,420 lb.)
Total		16 765 kg (36,960 lb.)
Typical Operating Weight with Front Push Block, Rear Ripper/Scarifier, and Other Equipment		
Front		5425 kg (11,960 lb.)
Rear		13 653 kg (30,100 lb.)
Total		19 078 kg (42,060 lb.)
Maximum Operating Weight		22 680 kg (50,000 lb.)